


SINGLE PHASE ON-GRID INVERTER

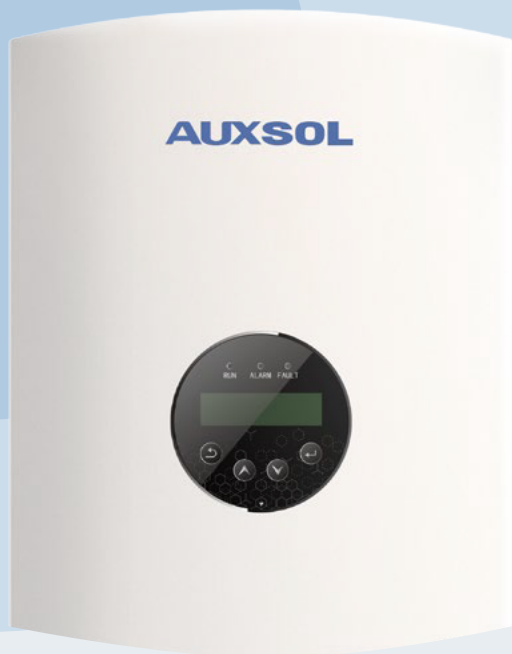

ASN-3.6SL-Plus

ASN-5SL-Plus

ASN-6SL-Plus

ASN-10SL

KEY FEATURES



80V start-up
voltage



Max. 150%
DC/AC ratio



Max. efficiency
98.1%



Optional
AFCI function



Optional
anti-backflow



Wide range of
MPPT voltage

ASN-10SL	
Input DC	
Max.input power	20kW
Max.input voltage	600V
Rated voltage	380V
Start-up voltage	40V
MPPT voltage range	40~550V
Max.input current	32A/16A
Max.short circuit current	40A/20A
MPPT number	2
Max. input strings number	3
MPPT Range Full Load	/
Output AC	
Rated output power	10kW
Max.apparent output power	10kVA
Max.output power	10kW
Rated grid voltage	1/N/PE,220V/230V/240V
Rated grid frequency	50Hz/60Hz
Rated grid output current	45.5A
Max.output current	45.5A
Power factor	1 (0.8 Leading ~ 0.8Lagging)
THDi	<3%
Efficiency	
Max. efficiency	98.1%
EU efficiency	97.6%
Protection	
Integrated DC switch	Yes
DC reverse-polarity protection	Yes
Anti-islanding protection	Yes
Short circuit protection	Yes
Output over current protection	Yes
Strings monitoring	Yes
DC Surge protection	Type II
AC Surge protection	Type II
Insulation impedance detection	Yes
Residual leakage current detection	Yes
Temperature protection	Yes
AC Over voltage protection	Yes
DC Over current protection	Yes
Anti-backflow	Optional
Integrated AFCI (DC arc-fault circuit protection)	Optional
General Data	
Dimensions(W*H*D)	400*383*177mm
Weight	15.6kg
Self Consumption(night)	≤1W
Operating Temperature Range	-30...+60℃
Cooling Concept	Natural Cooling
Max. Operation Altitude	4000m (Derating above 3000m)
Relative Humidity	0-100%
Ingress Protection	IP66
Topology Structure	Transformerless
Grid connection standard	EN 50549-1,IEC 61727,IEC 62116,IEC 61683,UNE 217001,UNE 217002,NTS-631
Safety/EMC standard	IEC/EN 62109-1/2,EN IEC61000-6-1/2/3/4,EN IEC 61000-3-11,EN 61000-3-12
Type of DC terminal	MC4 connector
Type of AC terminal	Quick connection plug
Display&Communication	
Display	LED+Bluetooth+APP,Optional:LCD
Communication Interface	RS485, Optional:WIFI,4G

Note: The specification and key features described in this datasheet may deviate slightly and are not guaranteed. AUXSOL reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the latest version of the datasheet, any commercial contracts that may be signed will be based on the most recent version at the moment of signing the contract.